

§ 761.45

equipment in accordance with paragraph (k)(2) of this section, and marks the individual capacitors at the time of removal from use in accordance with paragraph (a) of this section.

(2) All equipment not marked under paragraph (a) of this section containing a PCB Transformer or a PCB Large High or Low Voltage Capacitor.

(1)(1) All voltage regulators which contain 1.36 kilograms (3 lbs.) or more of dielectric fluid with a PCB concentration of ≥ 500 ppm must be marked individually with the M_L mark as described in § 761.45(a).

(2) Locations of voltage regulators which contain 1.36 kilograms (3 lbs.) or more of dielectric fluid with a PCB concentration of ≥ 500 ppm shall be marked as follows: The vault door, machinery room door, fence, hallway, or means of access, other than grates or manhole covers, must be marked with the M_L mark as described in § 761.45(a).

[44 FR 31542, May 31, 1979. Redesignated at 47 FR 19527, May 6, 1982, and amended at 47 FR 37359, Aug. 25, 1982; 50 FR 29201, July 17, 1985; 50 FR 32176, Aug. 9, 1985; 53 FR 12524, Apr. 15, 1988; 53 FR 27329, July 19, 1988; 63 FR 35443, June 29, 1998; 64 FR 33760, June 24, 1999]

§ 761.45 Marking formats.

The following formats shall be used for marking:

(a) *Large PCB Mark— M_L .* Mark M_L shall be as shown in Figure 1, letters and striping on a white or yellow background and shall be sufficiently durable to equal or exceed the life (including storage for disposal) of the PCB Article, PCB Equipment, or PCB Container. The size of the mark shall be at least 15.25 cm (6 inches) on each side. If the PCB Article or PCB Equipment is too small to accommodate this size, the mark may be reduced in size proportionately down to a minimum of 5 cm (2 inches) on each side.

(b) *Small PCB Mark— M_s .* Mark M_s shall be as shown in Figure 2, letters and striping on a white or yellow background, and shall be sufficiently durable to equal or exceed the life (including storage for disposal) of the PCB Article, PCB Equipment, or PCB Container. The mark shall be a rectangle 2.5 by 5 cm (1 inch by 2 inches). If the PCB Article or PCB Equipment is too small to accommodate this size, the

40 CFR Ch. I (7–1–00 Edition)

mark may be reduced in size proportionately down to a minimum of 1 by 2 cm (.4 by .8 inches).

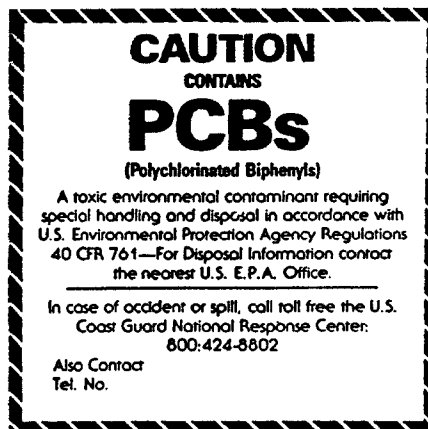


Figure 1

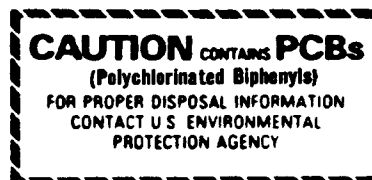


Figure 2

[44 FR 31542, May 31, 1979. Redesignated at 47 FR 19527, May 6, 1982]

Subpart D—Storage and Disposal

§ 761.50 Applicability.

(a) *General PCB disposal requirements.* Any person storing or disposing of PCB waste must do so in accordance with subpart D of this part. The following prohibitions and conditions apply to all PCB waste storage and disposal:

(1) No person may open burn PCBs. Combustion of PCBs approved under § 761.60 (a) or (e), or otherwise allowed under part 761, is not open burning.

(2) No person may process liquid PCBs into non-liquid forms to circumvent the high temperature incineration requirements of § 761.60(a).

(3) No person may discharge water containing PCBs to a treatment works (as defined § 503.9(aa) of this chapter) or to navigable waters unless the PCB